


Abrasives

TRIVODISC II

The new sanding star in the parquet sky!


Velcro sanding discs Ø 150 punched high-class corundum

Grit	Order-No
40	444 806 040
60	444 806 060
80	444 806 080
100	444 806 100
120	444 806 120




Velcro sanding discs Ø 150 CERAMIC

Grit	Order-No
36	444 813 036
50	444 813 050
60	444 813 060




Velcro sanding discs Ø 150 OXI Sand

Grit	Order-No	PU
40	448 107 040	50
60	448 107 060	50
80	448 107 080	100
100	448 107 100	100
120	448 107 120	100



Velcro sanding discs Ø 150 perforated zirconium

Grit	Order-No
40	444 809 040
60	444 809 060
80	444 809 080
100	444 809 100



FIBERPAD with Velcro backing

Ø	Order-No
150	488 811 000



Soft velcro pad Ø 150

Black	Order-No
5 mm	448 000 054
10 mm	448 000 053



Transport case TRIVO-DISC II including foam inlays

without accessories
 Order-No **112 882 800**

completely equipped
 Order-No **112 882 900**



Systainer TRIVO-DISC with special foam inlay without accessories

Order-No
 262 496 880 for TRIVO-DISC I
 262 496 000 for TRIVO-DISC II



Equipped with TRIVO-DISC II and a sample kit abrasives
 Order-No **112 882 700**



Disc brushes kit in systainer

Order-No **462 300 000**




Disc brush Ø 160

Grit	Order-No
46	462 300 046
60	462 300 060
80	462 300 080
V2A	462 300 500

Diamond Sanding Disc

Grit	Order-No
30/40	464 500 100
50	464 500 200
100	464 500 300



TRIVO-DISC II - 1.Auflage - 2500 - 03/2021

TRIVODISC II

If you want the best three disc sanding plate, you must rise above the good ones.

Developing the Trivo-Disc we have consulted the best experts: our customers

Because this first class three disc sanding plate not only makes parquet flooring shine but also fulfils the highest expectations of parquet and floor layers.

The Trivo-Disc is quiet running with powerful dust extraction.

Self-propelled and quickly mounted onto the Columbus models 145 SH (1500W) , 155 and Speedtronic.

Special features

- Thanks to the self-propelled Velcro grinding discs the removal rate is very effective. The results are effectively efficient.
- Perforated Velcro grinding discs and perforated abrasives allow collection of sanding dust and optimal heat dissipation.
- Large plate apertures allow optimal suction capacity.
- Self-propelled grinding discs with low-noise toothed belt technology.
- The speed of the Velcro grinding discs can be adjusted according to surface and task (Speedtronic).
- Included in the delivery: dust-shroud

The result

- One revolution of the disc equals 4 revolutions of the grinding plates. The result: 600 rpm – the ideal speed for the perfect finishing touch.


Attachments are easily changed.

- Attached very quickly to all Columbus models 145 SH (1500W), 155 and the Speedtronic without any specialist knowledge.



Technical data Trivo-Disc

- 3 support discs Ø 150 mm
- Working width 400 mm
- Weight 10 kg

Order No. TRIVO-DISC II
• 112 882 000

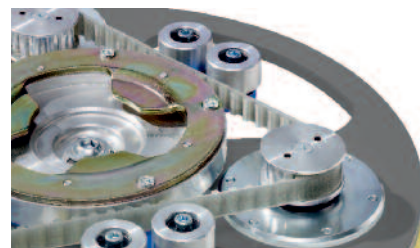

Grinding disc. Less vibration thanks to toothed belt technology, smooth running and less wear. Optimal toothed belt tension thanks to counter-pressure rollers.

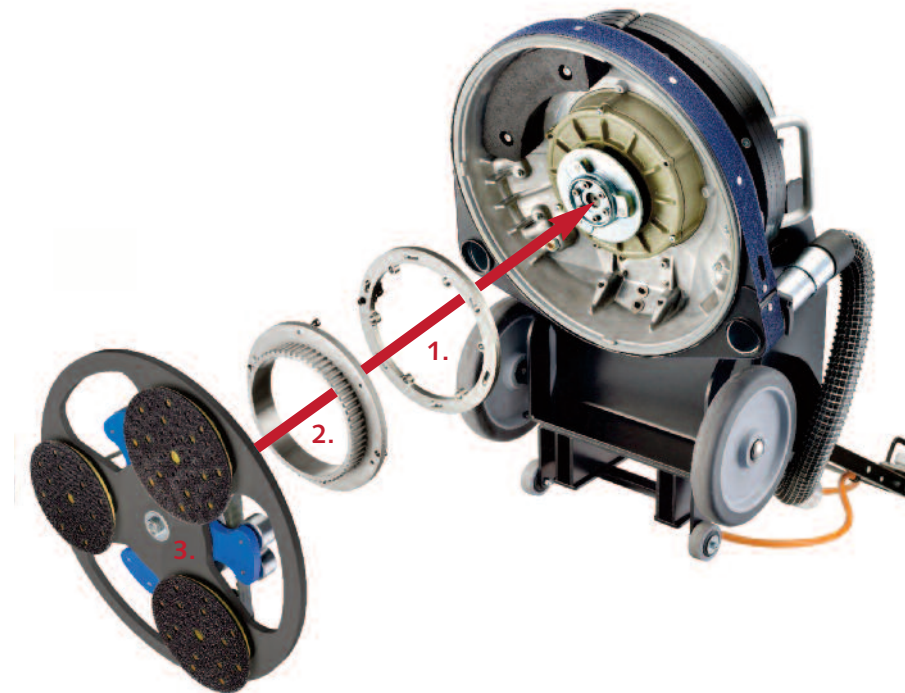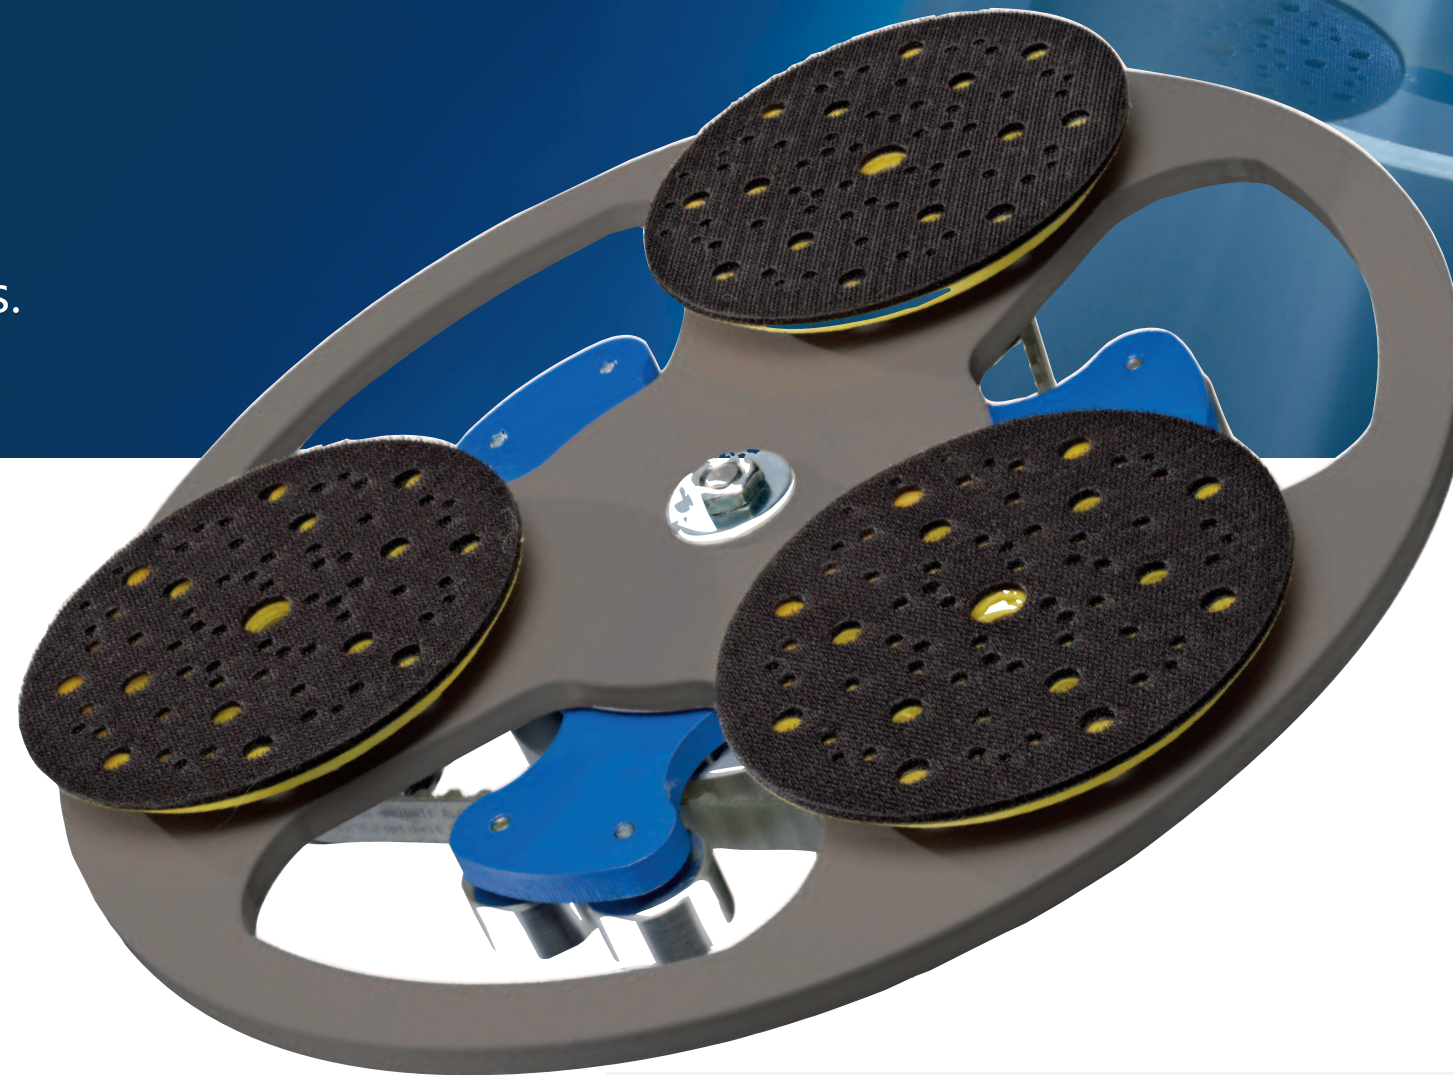

Grinding disc assembly

1. Mounting ring, one time assembly onto chassis using 3 screws
2. Toothed belt disc with locking mechanism
3. Three disc plate clicks into place/ locks onto drive

TRIVODISC II



Speedtronic. Enormous grinding capacity with variable speed control between 80 – 400 rpm. Efficient working thanks to optimal grinding pressure. Guided on casters guaranteeing fatigue-free working.



Columbus. Ideal torque. Easy handling. Quiet operation. Excellent price-performance ratio.